

_PRODUCT HIGHLIGHTS

Simply our best.





Groov-tec™ GD

ISO turning	Page
Cermet MP4 WEP10C turning indexable inserts	4
Grooving	Page
Groov-tec™ GD G5011 grooving system	6
Tiger-tec® Gold CVD grooving grades WKP13G/WKP23G/WKP33G	8
WE exchangeable heads and boring bars	10
WT26 indexable inserts and toolholder system	12
Thread turning	Page
TS T1011 external thread indexable inserts and toolholder system	14
Tapping	Page
Thread-tec™ Omni HSS-E TD117 Advance blind-hole tap	16
Thread-tec™ Omni HSS-E TD217 Advance through-hole tap	18
Thread milling	Page
TC620 Supreme thread milling cutter	20
TC645 Supreme thread milling cutter	22
Walter Xpress thread milling tools	24
Solid carbide milling tools	Page
Walter FMT standard PCD milling cutter	26
MC267, MC166 and MC467 Advance solid carbide milling cutters	28
Milling tools with indexable inserts	Page
Xtra-tec® XT M5460 profile milling cutter	30
Tiger-tec® Gold finishing grade WPM15G	31
Modular circular milling tools with exchangeable head	32
Rotating boring bars/adaptors	Page
Shell end milling cutter arbor and Weldon adaptors with C8	34
AB001-H, AB009-H and AB044-H HSK monoblock adaptors	35
AB001-S, AB009-S and AB044-S SK monoblock adaptors	36
AB001-J, AB009-J and AB044-J MAS-BT monoblock adaptors	37
Walter AB017 and AB025 hydraulic expansion and shrink-fit adaptors	38

Longer tool life for medium machining operations.

NEW

THE GRADE

- Wear-resistant TiCN/CN-based cermet substrate with Ni/Co binder and PVD TiCN/TiAlN coating
- Double the tool life thanks to unparalleled wear resistance

THE APPLICATION


- Machining parameters f : 0.08–0.35 mm, a_p : 0.4–3.5 mm
- Primary application: Steel ISO P10
- Secondary application: Stainless steel ISO M10 and cast iron ISO K10
- Machining of long-chipping materials (e.g. St37)
- Finishing with continuous and slightly interrupted cuts
- Use as a chamfer insert in boring tools due to straight cutting edge for C basic shape

THE GEOMETRY


- Curved cutting edge and deep chip breaker groove for low cutting forces
- Precision-sintered
- 7° clearance angle (CCMT, etc.)

Sectional view – geometry



Section:
Main cutting edge



Section:
Corner radius



Rounded cutting edge –
for stable machining operations
in the average inclination
(lead angle) and feed range

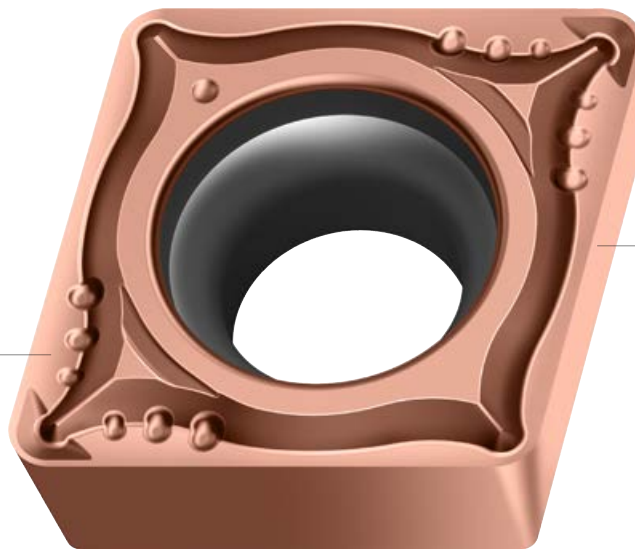

Wear-resistant
TiCN TiAlN coating

Cermet indexable insert

Fig.: CCMT09T308-MP4 WEP10C

POTENTIAL BENEFITS

- Very good chip breaking, even on long-chipping materials such as 16MnCr5 or structural steels
- No readjustment necessary, maximum dimensional accuracy
- Longer tool life and higher productivity in comparison to carbide



Double the serration – double the reliability.

NEW

THE TOOL

- Groov-tec™ GD grooving tool G5011 with and without precision cooling
- Indexable insert clamping can be operated from both sides
- 2 grooving depths 12 and 21 mm for optimum tool stability
- Shank sizes: 16x16, 20x20 and 25x25 mm

THE INDEXABLE INSERTS


- Patent-pending, double-edged GD26 cutting inserts with double serration clamping profile
- Grooving widths: 2.5 / 3.0 / 4.0 / 5.0 / 6.0 mm

THE GEOMETRY

- Parting off and grooving: CE4, CF5, CF6, GD6 and GD3
- Parting and grooving: UA4, UD4 and UF4
- With full radius: RD4 and RF8

THE GRADE

- 4 Tiger-tec® Gold PVD grades: WSM13G, WSM23G, WSM33G and WSM43G
- For steel, stainless steels and difficult-to-machine materials
- 3 Tiger-tec® Gold CVD grades: WKP13G, WKP23G and WKP33G
- For steel and cast iron machining

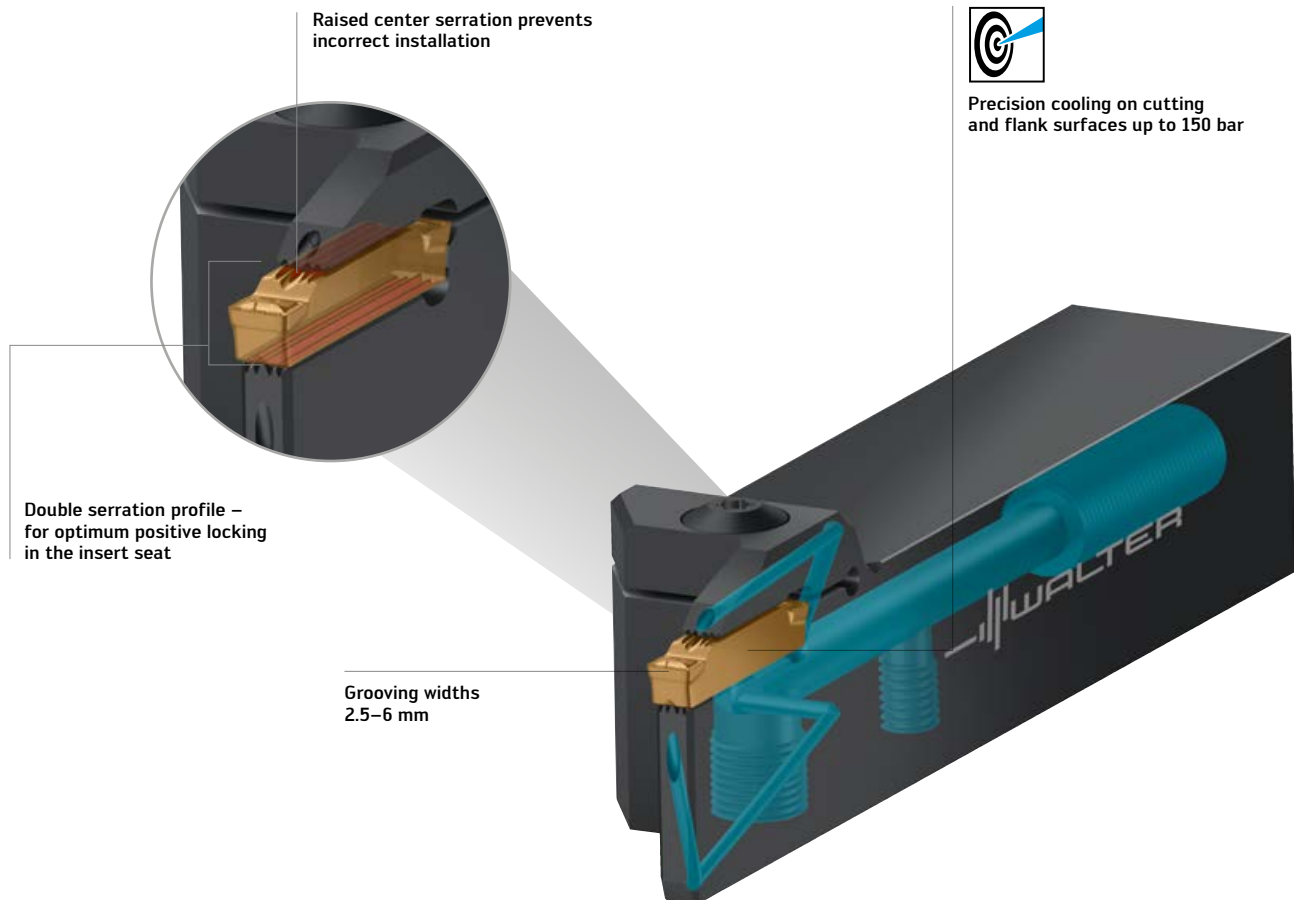


Powered by
Tiger-tec®Gold


THE TECHNOLOGY

- New insert design with double serration profile.
The GD26 cutting insert and tool body (insert seat) are optimally interlocked. The positive fit absorbs lateral forces better during longitudinal and copy turning
- Conventional systems (e.g. without double serrations) are significantly less stable in comparison.

Groov-tec™ GD

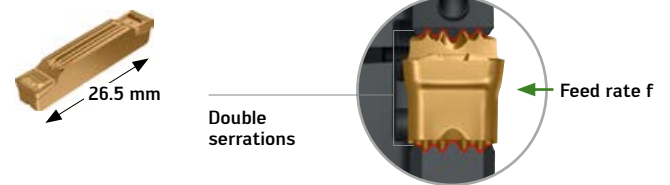


Existing grooving inserts

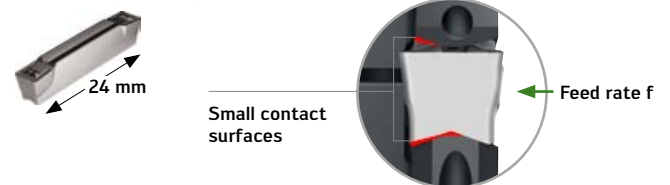

THE APPLICATION

- Radial grooving and parting off, recess turning and copy turning up to 26 mm grooving depth
- Universal use on lathes of all kinds

Greater stability in all applications – with Groov-tec™ GD

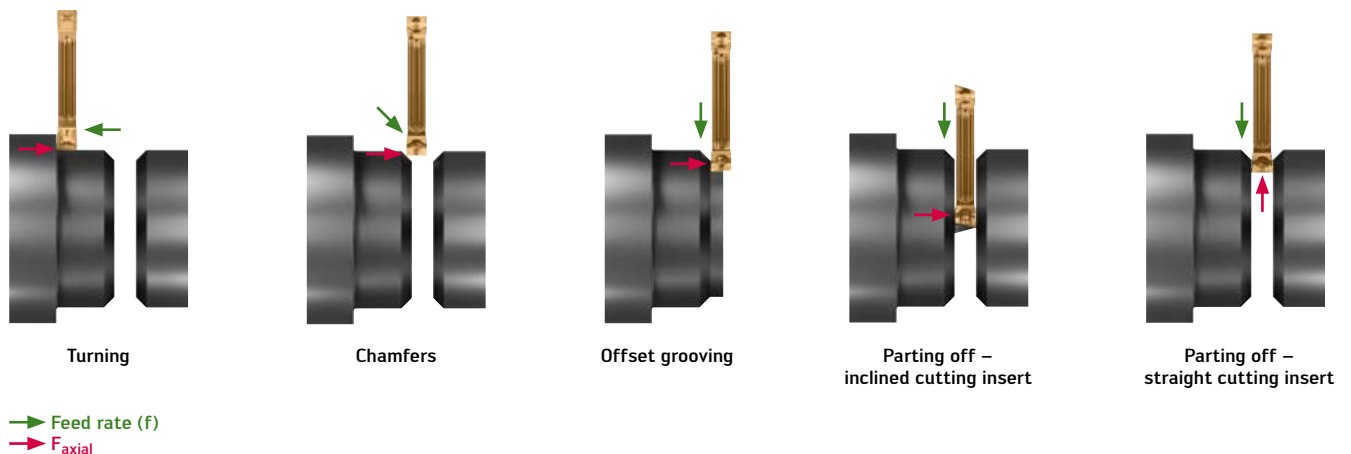

POTENTIAL BENEFITS

- Increased stability and process reliability thanks to Groov-tec™ GD serration profile
- Increased cutting parameters thanks to new serration profile and precision cooling
- Maximum productivity and service life thanks to wear-resistant Tiger-tec® Gold grades

Wear doesn't stand a chance.

NEW

THE INDEXABLE INSERTS

GD26 Groove-tec™ GD

- Patent-pending, double-edged GD26 cutting inserts with double serration profile for perfect positive engagement in the insert seat
- For G5000 tool types

DX18

- Double-edged DX18 cutting inserts with top, bottom and back pocket support for strong insert seating
- For G4000 tool types

THE APPLICATION

- CVD grades; primary application:

Groove turning, copy turning and grooving

WKP13G (ISO P10 ; ISO K20)

- High wear resistance and cutting speed
- Continuous cut

WKP23G (ISO P20 ; ISO K25)


- High wear resistance and cutting speed
- Continuous to occasional interrupted cut
- Universal grade for approx. 80% of all applications

WKP33G (ISO P30 ; ISO K30)

- Excellent wear resistance and toughness
- For unfavorable conditions and interrupted cuts
- Steel and cast iron materials

APPLICATION EXAMPLE



Cut-off ring Ø 30.5 mm



Material:	38MnVS6 / 1.1303
Strength:	800 N/mm²
Machine:	Index MS40
Indexable insert:	GD26-3E300N03-UD4 WKP23G
Tool:	G5011-2020L-3T21GD26-P


Cutting data	up to now	Walter WKP23G
s (mm)	3	3
v _c (m/min)	130	130
f (mm)	0.13	0.13
T (mm)	4	4
Cooling	Oil, 40 bar	Oil, 40 bar
Tool life	2500	4000

Comparison: Tool life

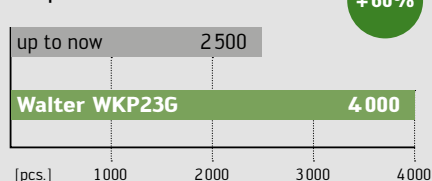

Highly textured Al₂O₃ – for greater resistance to crater wear

Multi-layer MT-TiCN coating for greater toughness and reduced flank face wear

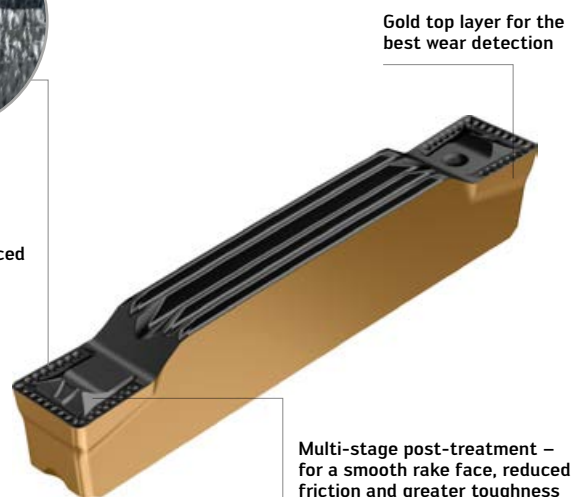


Gold top layer for the best wear detection

Multi-stage post-treatment – for a smooth rake face, reduced friction and greater toughness

Fig.: GD26-4E400N04-UD4 WKP23G

POTENTIAL BENEFITS

- High level of cost-efficiency due to Tiger-tec® Gold coating
- Average increase in tool life of around 50%
- High productivity, short machining times – ideal for mass production
- Wear-resistant cutting tool material (alternative to WSM grades)

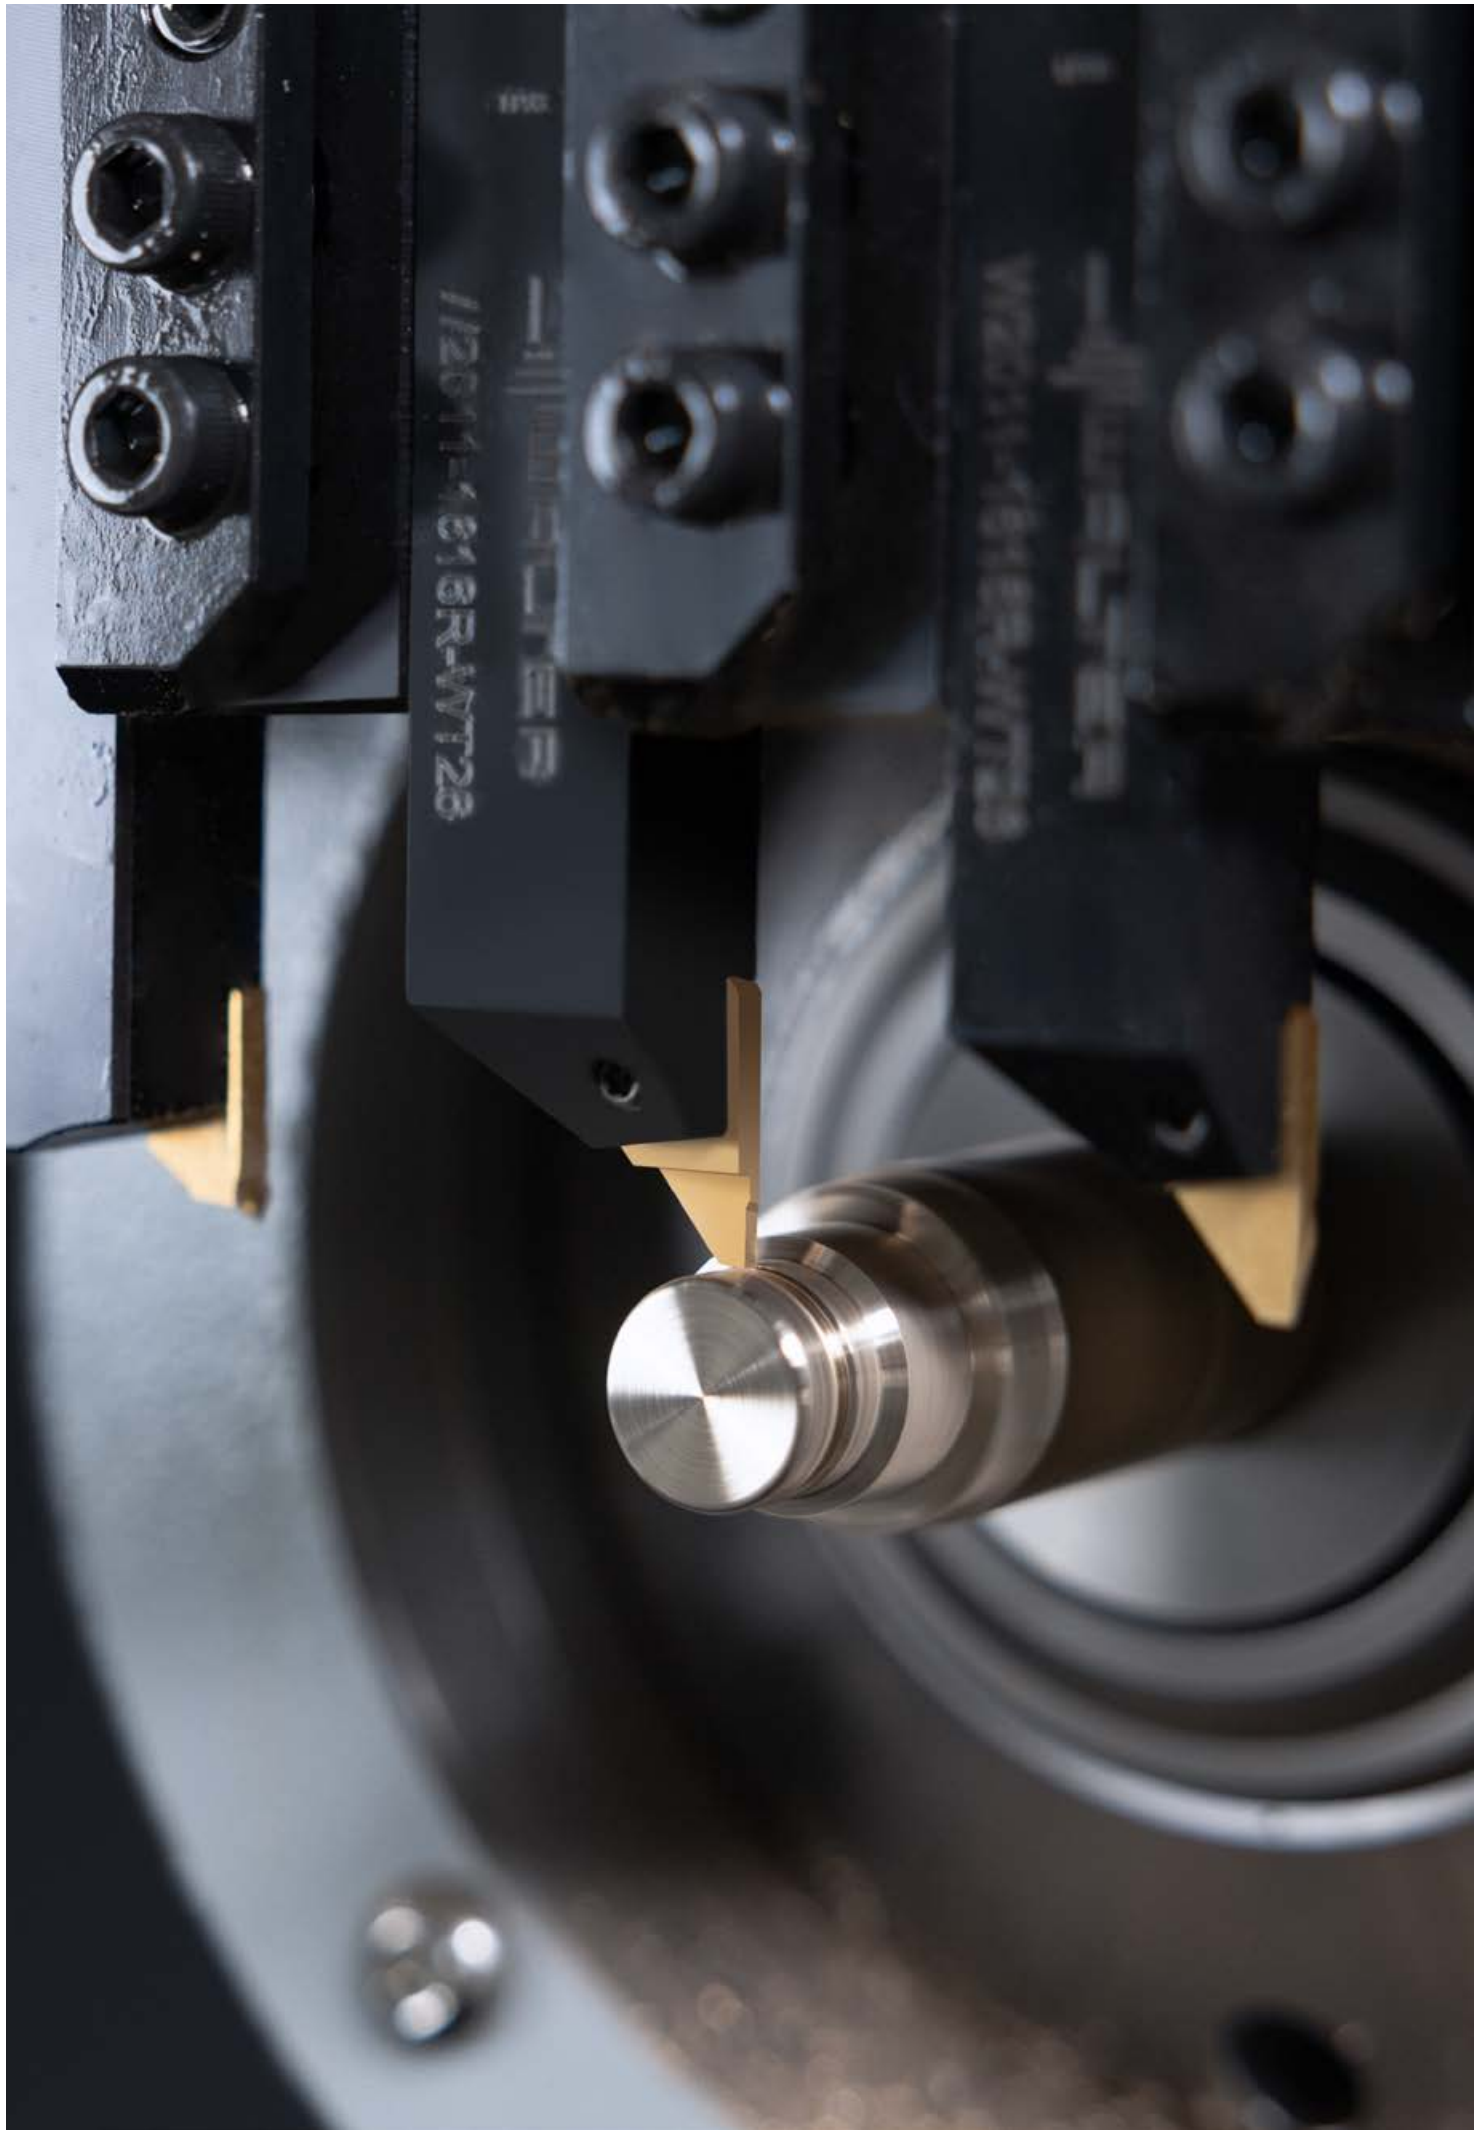

1/2014-4616R-WT23

1/2014-4616R-WT23

Full flexibility, complete precision.

NEW

THE TOOL

W3270/W3271 boring bars

- Dia.: 12 and 16 mm; 0.5 and 0.625" with clamping surface
- Coolant outlet on both sides for universal applicability
- Optimized coolant supply available for axial grooving
- Available in steel and carbide

WE interchangeable heads

- "Walter Exchangeable" (WE) head for internal machining from min. dia. 7 mm
- Axial grooving from min. dia. 12 mm
- "Walter Exchangeable" (WE) positive engagement for stability and accuracy
- Precision-ground cutting edge
- Chip breaker geometry available


THE GRADE

WSM23X

- Primary application: Steel ISO P25, stainless steel ISO M25, materials with difficult cutting properties ISO S25
- Secondary application: Non-ferrous metals ISO N25
- Universal PVD grade for parting off/grooving and turning with moderate to low v_c and a_p
- PVD multi-layer TiAlN and TiN top layer

WSM13X

- Primary application: Steel ISO P15, stainless steel ISO M15, materials with difficult cutting properties ISO S15, NF metals ISO N15
- Higher wear resistance (compared to WSM23X) for stable machining conditions
- PVD multi-layer TiAlN

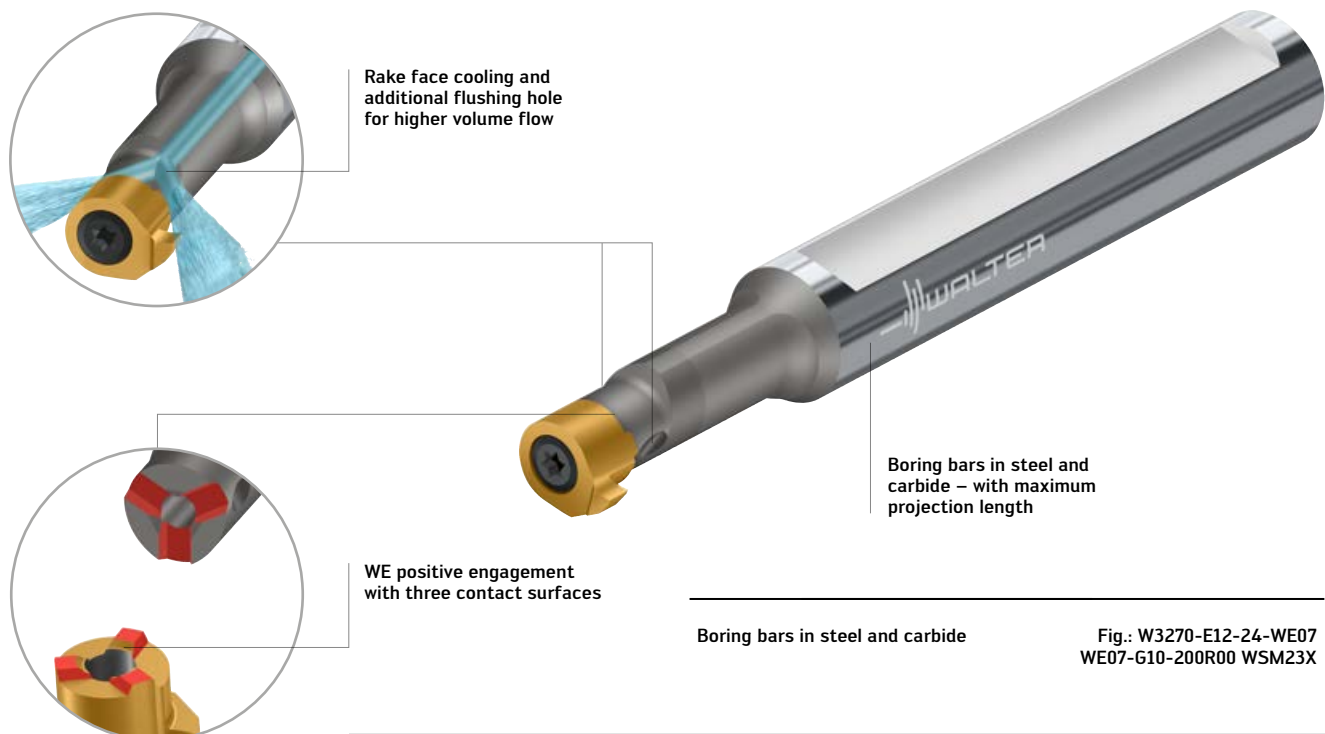

POTENTIAL BENEFITS


- Process reliability and high level of stability due to WE positive engagement
- Repeatable machining quality and minimized rejection rate
- Maximum flexibility due to WE exchangeable head replacement in the same toolholder (from D_{min} 7 mm)
- Large standard range (as well as special products with a shorter delivery time)
- Maximum precision and tool life due to precision-ground, sharp cutting edge

THE APPLICATION

- High-precision components


Exchangeable head types and applications

Size comparison

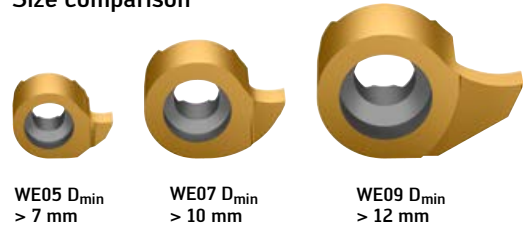

WE exchangeable heads

Fig.: WE05-G07-150R00 WSM23X
WE07-G10-200R00 WSM23X
WE09-G14-200R00 WSM23X

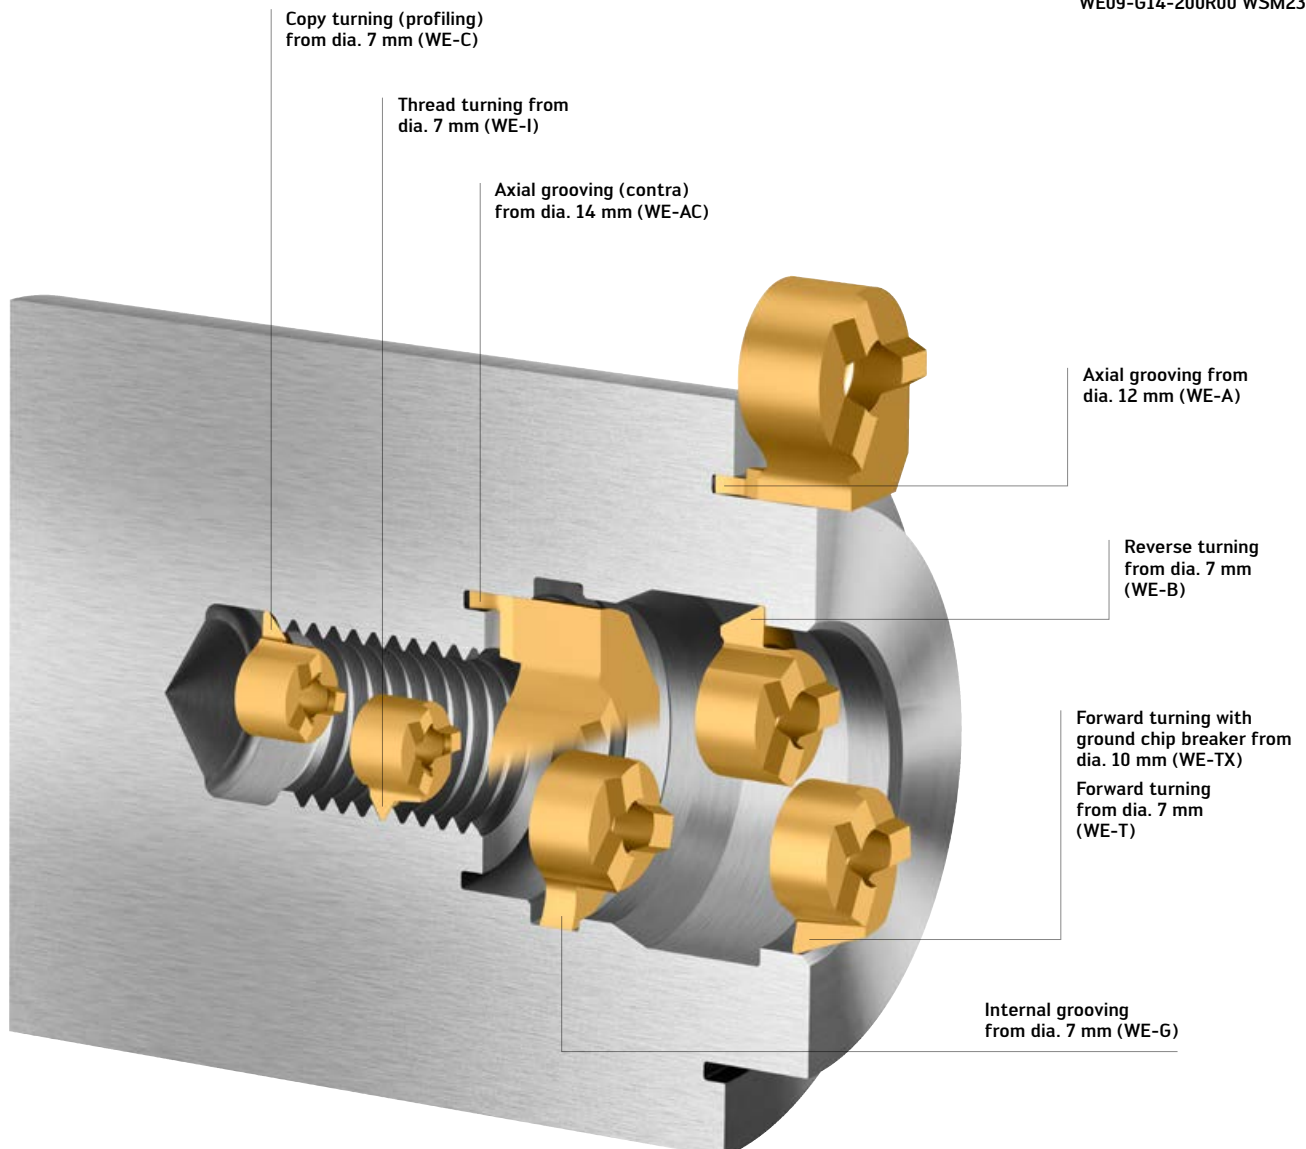

Maximum sharpness for ultimate precision.

EXPANSION OF THE RANGE

NEW ADDITION TO THE PRODUCT RANGE

- WT26 partial-profile thread turning inserts
- WT26 full-profile thread turning inserts

THE TOOL

- From a workpiece diameter of 1 mm – for automatic lathes and multi-spindle machines
- Precision-ground indexable inserts and toolholders
- Indexable insert screw can be accessed from both sides for simple insert indexing
- Shank sizes: 10 × 10, 12 × 12 and 16 × 16 mm

THE INDEXABLE INSERTS

- Tangentially installed WT26 indexable inserts for machining precision turned parts
- Sharp cutting edges for optimum machining results at low feeds
- Precision-ground cutting edge and chip breaker groove for ultimate precision


THE GRADE

WSM23X

- Universal PVD grade for parting off/grooving and turning with moderate to low v_c and a_p
- Primary application: Steel ISO P25, stainless steel ISO M25, materials with difficult cutting properties ISO S25, non-ferrous metals ISO N25

WN23

- Uncoated carbide grade, extremely tough and abrasion-resistant for ISO N
- Primary application: ISO N20; secondary application ISO P, S and O

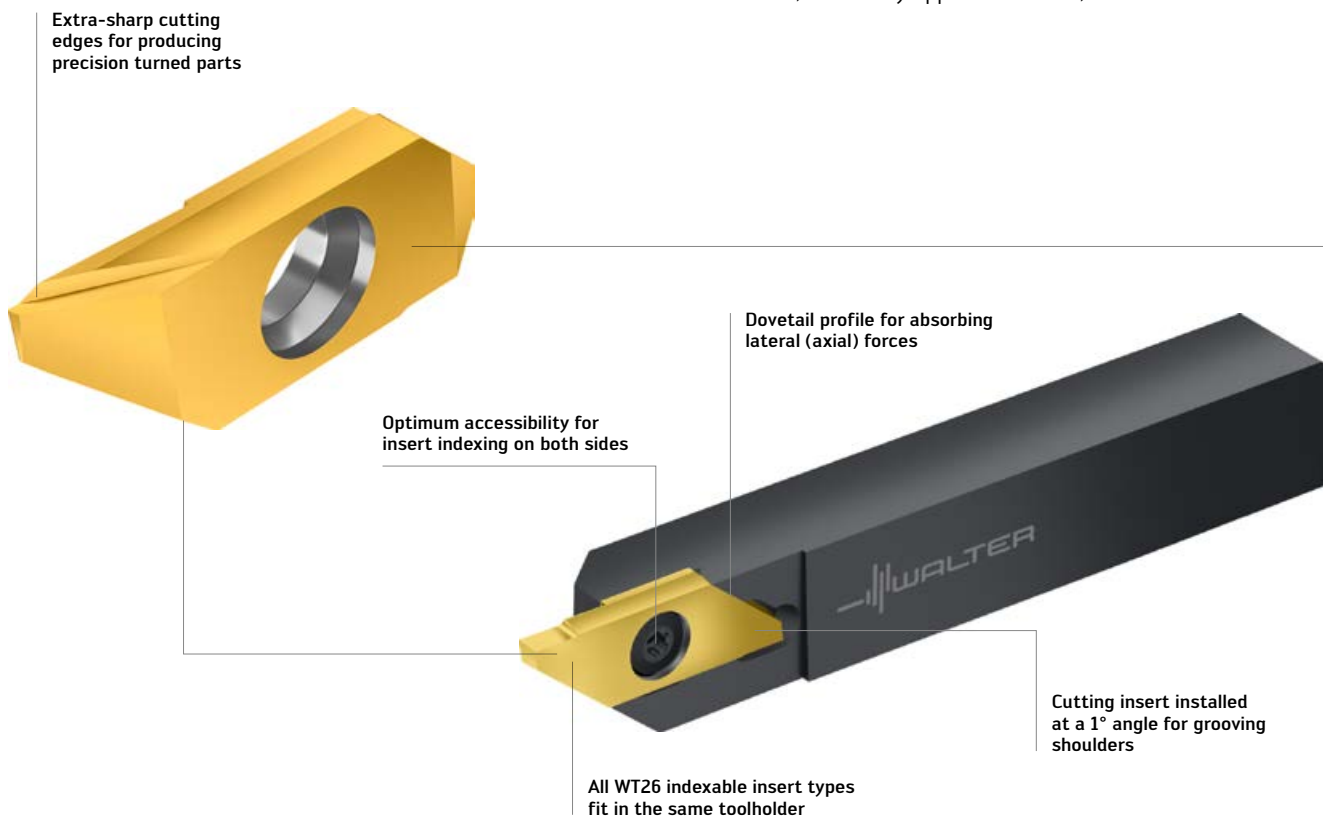


WT26 indexable insert and W2011 precision toolholder

Fig.: WT26-R300R010-VG8 WSM23X
Fig.: W2011-1212R-WT26

THE APPLICATION


- Parting off and grooving, forward and reverse turning; thread turning on sliding-head (Swiss turning) lathes and multi-spindle machines
- Grooving along close shoulders thanks to installation of the cutting insert at a 1° angle
- High-precision components

Walter solutions for automatic lathes

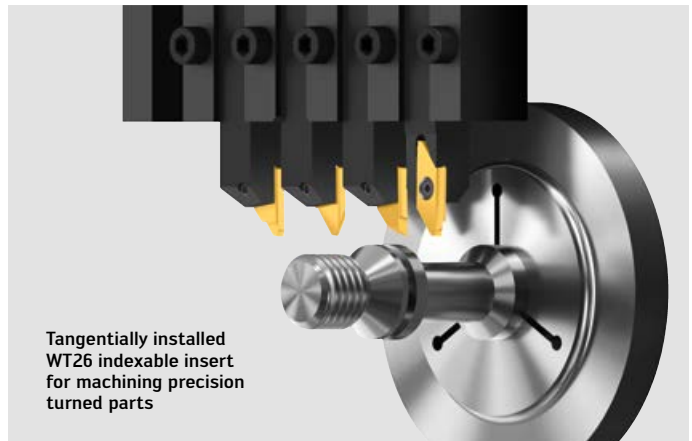


THE GEOMETRIES


CD8 chip breaker geometry for parting off





GD8 chip breaker geometry for grooving




VG8 chip breaker geometry for reverse turning and copy turning




DG8 chip breaker geometry for forward turning



RA8 chip breaker geometry for radius grooving



UA8 chip breaker geometry for grooving and longitudinal turning



ISO partial-profile thread geometry
ISO full-profile thread geometry

NEW

POTENTIAL BENEFITS

- High level of flexibility: All WT26 indexable insert types can be inserted in the same toolholder
- User-friendly due to tangential screw clamping which can be operated from both sides
- Maximum precision and tool life due to precision-ground, sharp indexable inserts

Thread turning with Tiger technology.

NEW

THE TOOL

- T1011 External threading tools with carbide-pin claw clamping
- Rigid clamping and carbide pin contact for high thread precision

THE INDEXABLE INSERTS

- TS thread turning inserts in sizes TS16 & TS22 mm
- Precision-ground multi-tooth indexable inserts for high accuracy and productivity
- Chip breaker geometries F5 and M5
- Large standard program; specials on request

THE GRADE


- New Tiger-tec® Gold PVD grades specially developed for thread turning

WMP22G

- Wear-resistant grade for maximum cutting speeds
- Main application: ISO P steel, ISO M stainless steel
- Secondary application: difficult-to-machine materials ISO S, secondary application: difficult-to-machine materials ISO S, non-ferrous metals ISO N and cast iron ISO K

WMP32G

- Universal grade for 80 % of all applications with high process reliability
- Main application: ISO-P steel, ISO M stainless steel
- Secondary application: difficult-to-machine materials ISO S, cast iron ISO K

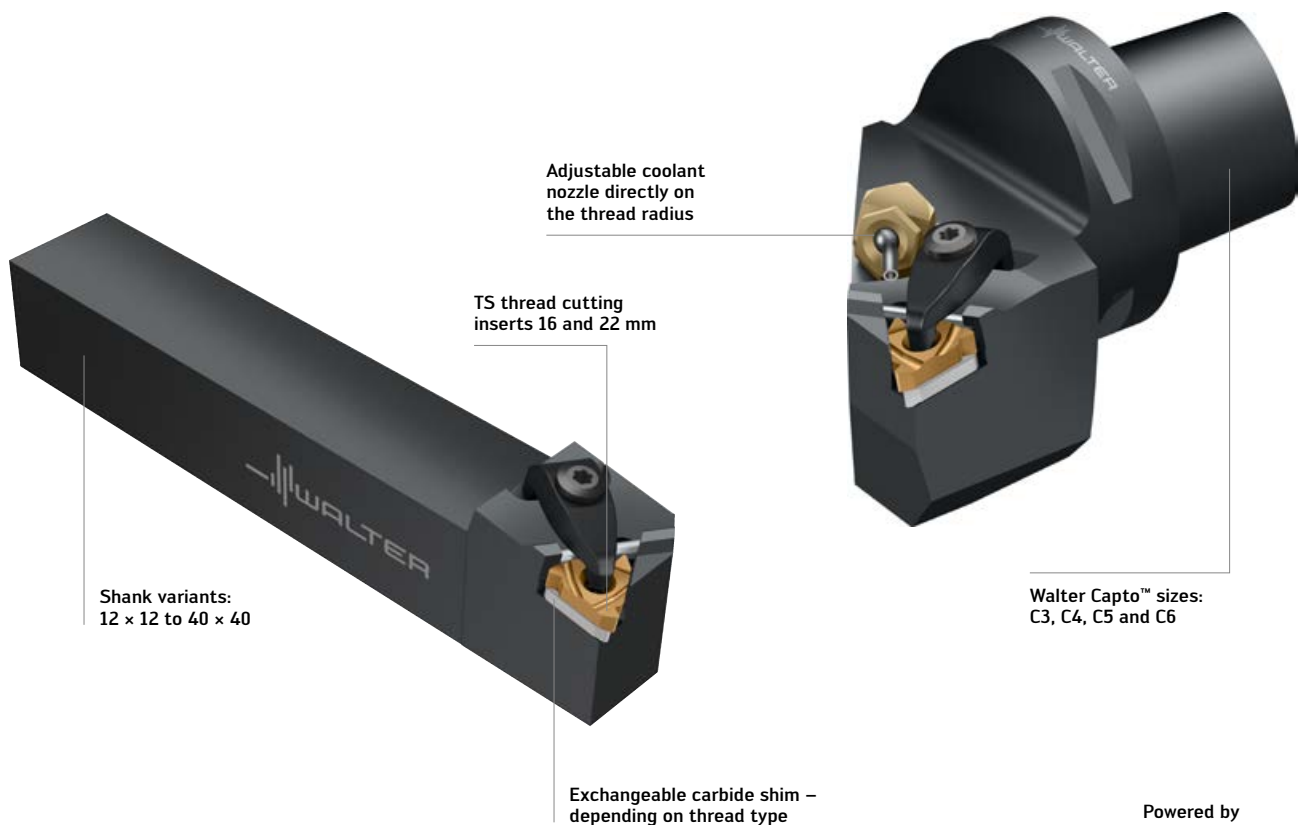

TS threading system

Fig.: T1011-2525L-TS16-S
Fig.: T1011-C5R-35060-TS16

THE TECHNOLOGY

Stable rigid clamping
for optimum indexable
insert attachment

Carbide pin for indexable
insert contact (no insert
seat deformation!)



THE APPLICATION

- Reusable full-profile threads: ISO, UN and UNJ
- Permanent full-profile threads for pipes and fittings: W, BSPT, NPT/NPTF, RD
- Motion-transmitting full-profile threads: TR, ACME, BUTT
- Partial profile thread: 55° and 60° V-profile



THE GEOMETRY

F5 geometry for ISO P / M

- Precision-sintered
- “Narrow” pressed-in chip recess
- Fine threads on steel and stainless steels
- Very good chip breaking behavior with both low and high in-feed methods

M5 geometry for ISO M / P

- Center pressed-in chip recess “more open”
- External thread on stainless steels and steel
- Very good chip breaking behavior with all in-feed methods
- Low burr formation

2/3 multi-tooth geometry for ISO P / M

- Precision-ground
- Multi-tooth external thread on steel and stainless steels
- First choice for mass production
- 40% fewer passes, resulting in shorter machining times

POTENTIAL BENEFITS

- High stability and process reliability thanks to carbide pin fixation in the insert seat
- Maximum tool life thanks to stable indexable insert system
- Very good chip breaking
- Maximum productivity and service life thanks to multi-tooth inserts and Tiger-tec® Gold grades

Thread·tec™ – the versatile and universal thread range.

NEW

THE TOOL


- HSS-E blind hole tap
- Grades: WY80FC, WY80RG and WY80AA
- Tolerances: 6HX, 6GX and 6Hmod
- Variant: Extra-long
- Chamfer forms: C and E

Dimensions:

- Metric: M1.6 – M42
- Metric: M3–M20 (DIN/ANSI)
- Metric fine: M4×0.5 – M30×2
- Thread insert: EGM10 – EGM16

THE APPLICATION

- Blind-hole thread up to $2.5 \times D_N$
- Suitable for ISO materials P, M, K and N
- Area of use: General mechanical engineering

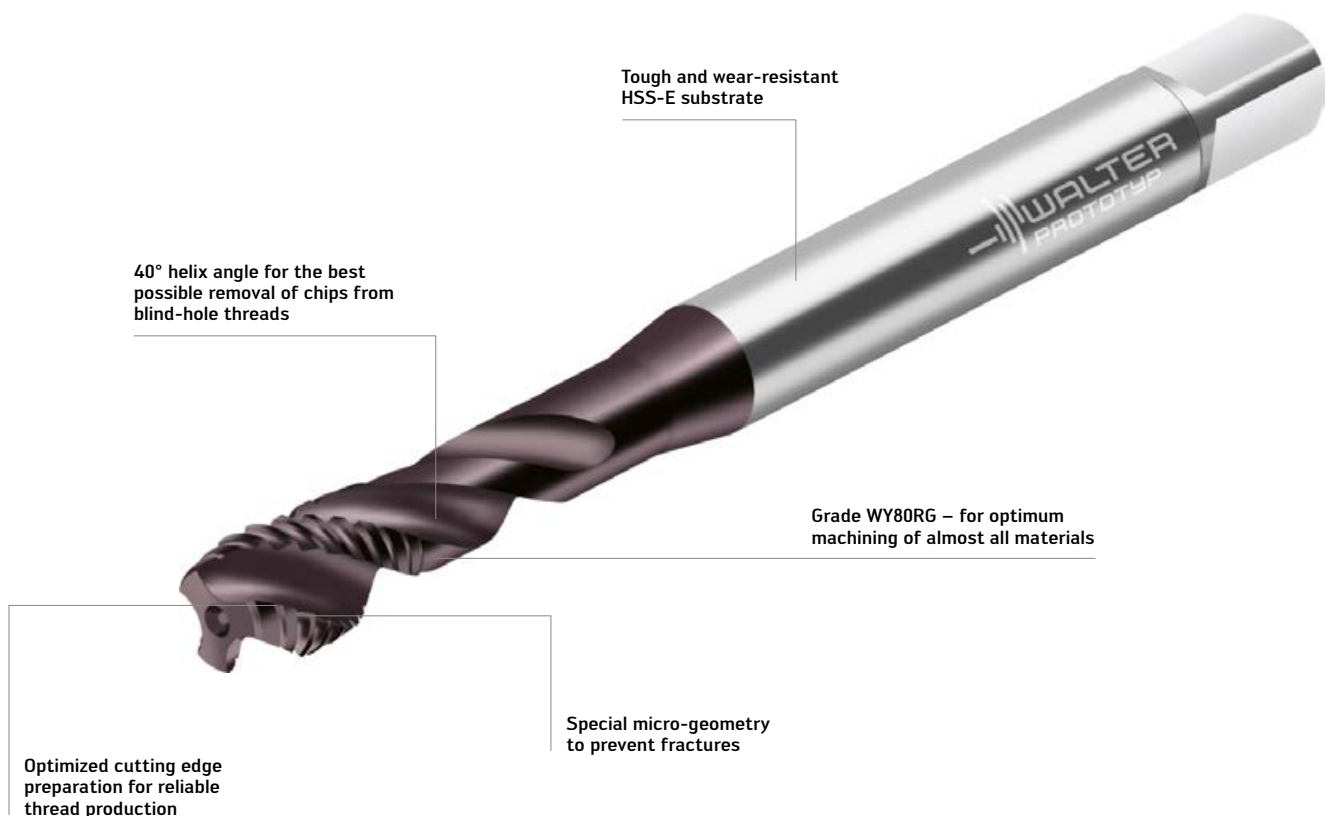

Thread·tec™ Omni TD117 Advance

Fig.: TD117-M10-C0-WY80RG



Grade WY80FC:
Universal application with
excellent chip formation




Grade WY80RG:
High performance in
ISO M and ISO N materials



Grade WY80AA:
First choice for ISO P
and ISO K materials

APPLICATION EXAMPLE


Coupling flange



Material: 11SMn30/1.0715
Strength: 650 N/mm² / 195 HB
Dimension: M10
Tap: TD117-M10-E0-WY80RA

Cutting data	Competitor	Walter TD117 Advance
v_c (m/min)	18	18
Thread depth (mm)	22	22
Cooling	external	external
Tool life (number of threads)	185 – Breakage	252 – No breakage

Comparison: Tool life

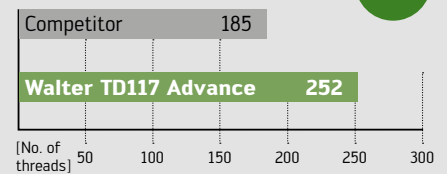

POTENTIAL BENEFITS

- Reliable thread production
- Universal application for numerous materials
- Reduction of tool and inventory costs

Thread·tec™ – a safe choice for every application.

NEW

THE TOOL

- HSS-E through hole tap
- Grades: WY80FC, WY80RG and WY80AA
- Tolerances: 4HX, 6HX, 6GX and 7GX
- Variants: Long, extra-long and left-hand cutting
- Chamfer form B

Dimensions:

- Metric: M1–M56
- Metric: M3–M20 (DIN/ANSI)
- Metric fine: M2.2×0.25 – M50×1.5

THE APPLICATION

- Through-hole thread up to $3 \times D_N$
- Suitable for ISO materials P, M, K and N
- Area of use: General mechanical engineering

Grade WY80RG – ideal for
machining almost all materials

Enhanced tolerance position –
increases tool life for all
dimensions and profiles

Enhanced spiral point angle –
increases performance

Advanced edge relief grinding –
for applications in many different materials



P	M	K	N
••	••	••	••

Grade WY80FC:
Universal application with a
wide selection of dimensions
in the standard range



P	M	K	N
•	••	•	••

Grade WY80RG:
High performance in ISO M
and ISO N materials



P	M	K	N
••	•	••	•

Grade WY80AA:
First choice in ISO P
and ISO K materials




HSS-E substrate with greater hardness – optimizes wear resistance and tool life

Thread-tec™ Omni
TD217 Advance

Fig.: TD217-M10-
C0-WY80RG

APPLICATION EXAMPLE


Guide flange



Material: 42CrMo4/1.7225/4140
Strength: 900 N/mm² / 266 HB
Dimension: M12
Tap: TD217-M12-E0-WY80AA

Cutting data	Competitor	Walter TD217 Advance
v_c (m/min)	15	21
Thread depth	18	18
Cooling	external	external
Tool life (number of threads)	264	330

Comparison: Tool life

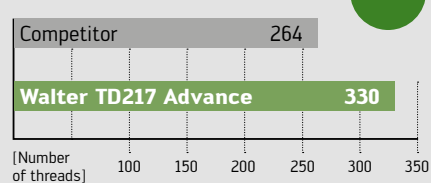

POTENTIAL BENEFITS

- Reliable thread production
- Universal application for various materials
- Reduced tool and inventory costs

Low vibration – thanks to DeVibe and multi-row design.


EXPANSION OF THE RANGE

NEW ADDITION TO THE PRODUCT RANGE

- Walter DeVibe Technology for
- $3 \times D_N$ – M4 – M20
- 2 and $2.5 \times D_N$ from M4; UNC8
- $2 \times D_N$ from UNF10; M4×0.5
- $2 \times D_N$ – G1/16 – G1/2

THE TOOL

- Multiple-row thread milling cutter for universal application
- Walter DeVibe technology for vibration damping

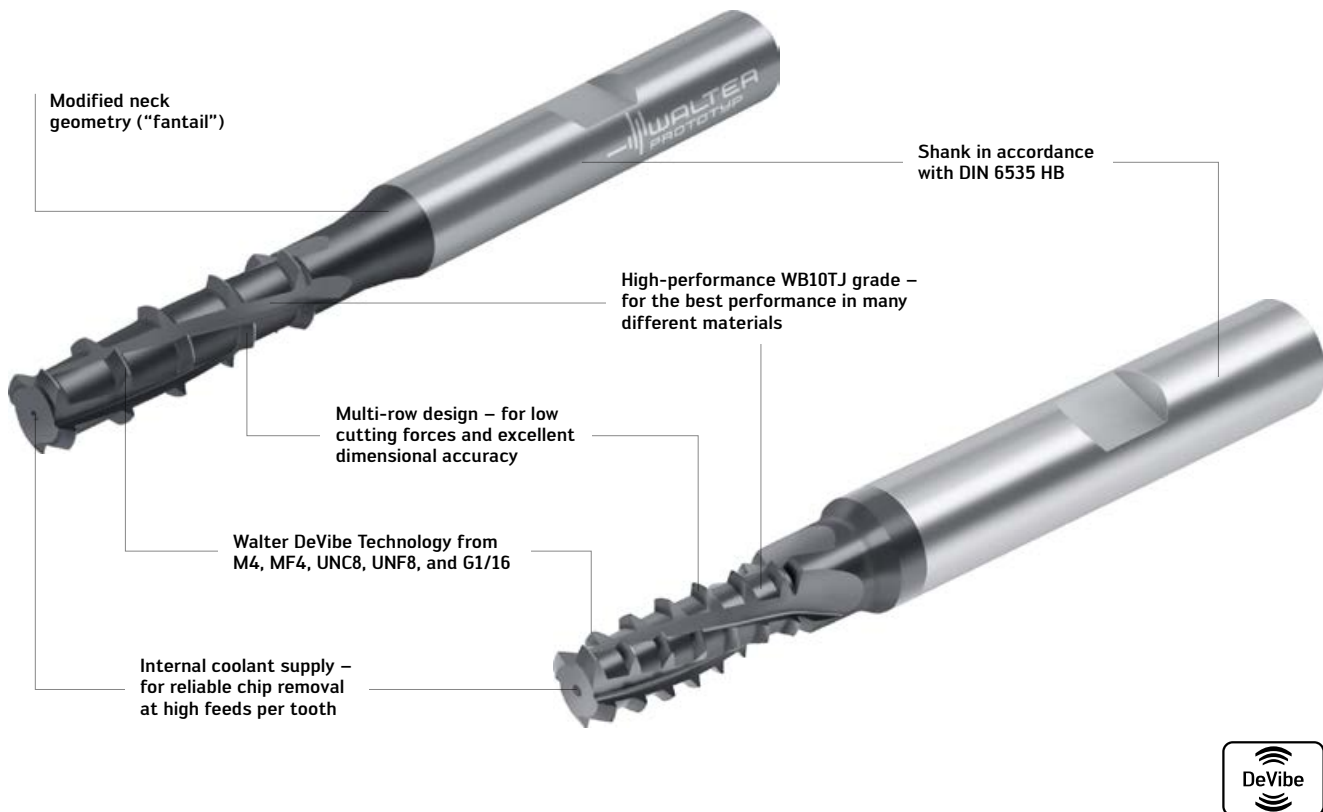

Multi-row solid carbide thread milling cutter

Fig.: TC620-M10-W5F-WB10TJ
Fig.: TC620-G1/4-W5D-WB10TJ

POTENTIAL BENEFITS


- Low cost per thread thanks to fast machining time and high tool life quantity
- High level of process reliability and easy handling due to extremely infrequent radius corrections
- Walter DeVibe technology: Reliable machining, even in extreme conditions
- Universal application in many different materials

THE APPLICATION

- Blind-hole and through-hole threads
- ISO materials P, M, K, N and S up to 48 HRC
- Thread depths $2 - 3 \times D_N$
- Ideal for strict requirements on process reliability (e.g. for expensive components)

APPLICATION EXAMPLE

Holder



Material: 42CrMo4/1.7225/4140

Strength: 820 N/mm²

Thread size: M6

Thread depth: 18 mm


Blind/through hole: Blind hole

Tool: TC620-M6-W5F-WB10TJ


Cutting data	Orbital thread milling cutter	Walter TC620 Supreme
v_c (m/min)	97	121
F_z (mm)	0.067	0.079
Strategy	Climb Milling	Conventional Milling
Cooling	external	internal
Processing time (s)	12.9	3.4

Comparison: machining time

– 74%

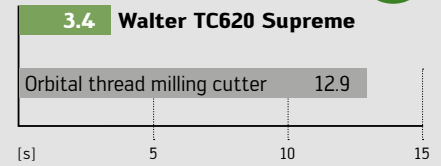

THE STRATEGY

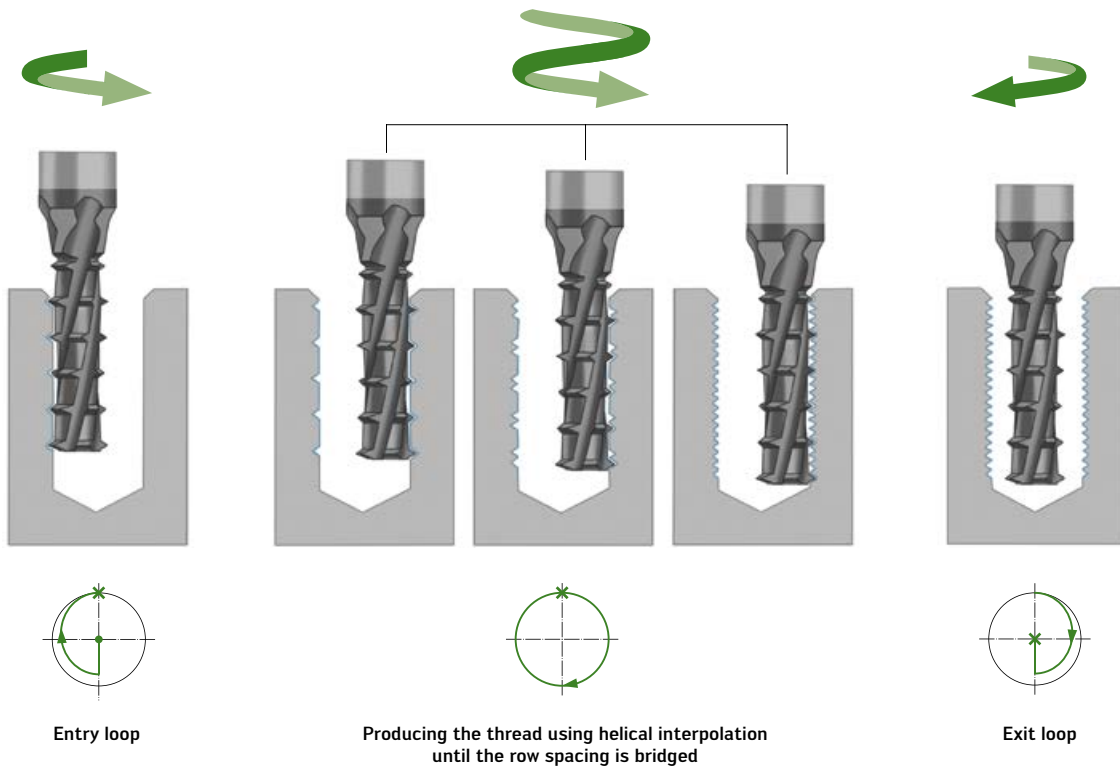

Thrill-tec™ – quick and universal, even for larger threads.

EXPANSION OF THE RANGE

NEW ADDITION TO THE PRODUCT RANGE

- 2 and $2.5 \times D_N$ M14 – M20
- 2 and $2.5 \times D_N$ UNC 9/16 – 3/4
- $2 \times D_N$ G1/2

THE TOOL

- Orbital drill/thread mill for universal machining
- Creation of core hole and thread in one operation
- Can also be used for chamfering
- IMPORTANT: Left-hand cutting tool

THE APPLICATION

- Blind-hole and through-hole threads
- ISO materials P, M, K, N and S up to 48 HRC
- Thread depths of 2 and $2.5 \times D_N$



Thrill-tec™

Solid carbide orbital drill/thread mill

Fig.: TC645-M16-A1D-WB10TJ

POTENTIAL BENEFITS

- Maximum process reliability thanks to high stability
- Very low cost per thread (high tool life quantity, fast machining time)
- Reduces the number of tool positions and the tool change time
- Universal application



Customized and cost-effective – delivery time of just three weeks.

SPECIAL TOOL

THE TOOL

- TC610/TC611 Supreme full effective thread milling cutter
- TC620 Supreme multi-row thread milling cutter
- TC630 Supreme orbital thread milling cutter
- Thrill-tec™ orbital drill/thread mills – TC645 and TC685 Supreme

THE GEOMETRY

- Internal/external cooling or shank cooling
- With and without countersink, deburring chamfer, DeVibe
- M, MF, UNC, UNF, EG thread
- NPT/NPTF
- Note: G and J threads in the next step

THE INTERFACE

- Shank types in accordance with DIN 6535 HA, HB or HE

THE APPLICATION

- Blind-hole and through-hole threads
- ISO material groups P, M, K, N, S and H
- Universal or speciality applications
- Thread depths up to $4 \times D_N$
- Areas of use: General mechanical engineering, mold and die making, aerospace, medical technology, automotive and energy industries

Different tool types

(depending on the area of application)



Solid carbide orbital
thread milling cutter

Fig.: TC630-SUNF1/4-A0D-WB10RA
Fig.: TC645-G1/4-A1D-WB10TJ
Fig.: TC685-M8-A1D-WB10RC

Different substrate versions (coating/carbide)
depending on the area of application



Multi-row solid
carbide thread
milling cutter

Fig.: TC620-M8-W5E-WB10TJ



Solid carbide full
effective thread
milling cutter

Fig.: TC610-M8-W1-WJ30RC



Solid carbide full
effective thread milling
cutter with countersink

Fig.: TMC - H5055016

POTENTIAL BENEFITS

- Greater flexibility due to delivery time of just three weeks
- Fewer tool design errors through a rule-based design approach in accordance with the component definition
- Superior results due to proven standard technology plus optimum special design

Think lightweight. Together.

NEW

NEW ADDITION TO THE PRODUCT RANGE

- MP270, MP271 and MP470 PCD milling cutter ranges

MP270

- MP270 PCD milling cutter with solid carbide shank

MP271

- MP271 PCD milling cutter with solid carbide shank

MP470

- MP470 PCD ball-nose end mill with solid carbide shank

THE TOOL

- MP060 face milling cutter with maximum number of teeth; dia. 40–125 mm
- MP160 shoulder milling cutter with cylindrical shank and ScrewFit adaption; dia. 16–40 mm
- MP260 routing cutter with cylindrical shank and ScrewFit adaption; dia. 4–20 mm

THE GRADE

- WDN20

THE APPLICATION

- Milling operations with the highest surface quality
- Non-ferrous metals (e.g. aluminium, Al-Si alloys, magnesium and magnesium-based alloys), as well as plastics and fibre-reinforced plastics
- Can be used with emulsion, oil and MQL
- Areas of use: Automotive industry, aerospace industry, general mechanical engineering

MP270

NEW



PCD routing cutter

Fig.: MP270 WDN20

MP470

NEW



PCD ball-nose end mill

Fig.: MP470 WDN20

MP271


NEW



PCD shoulder/slot
milling cutter

Fig.: MP271 WDN20

THE RANGE

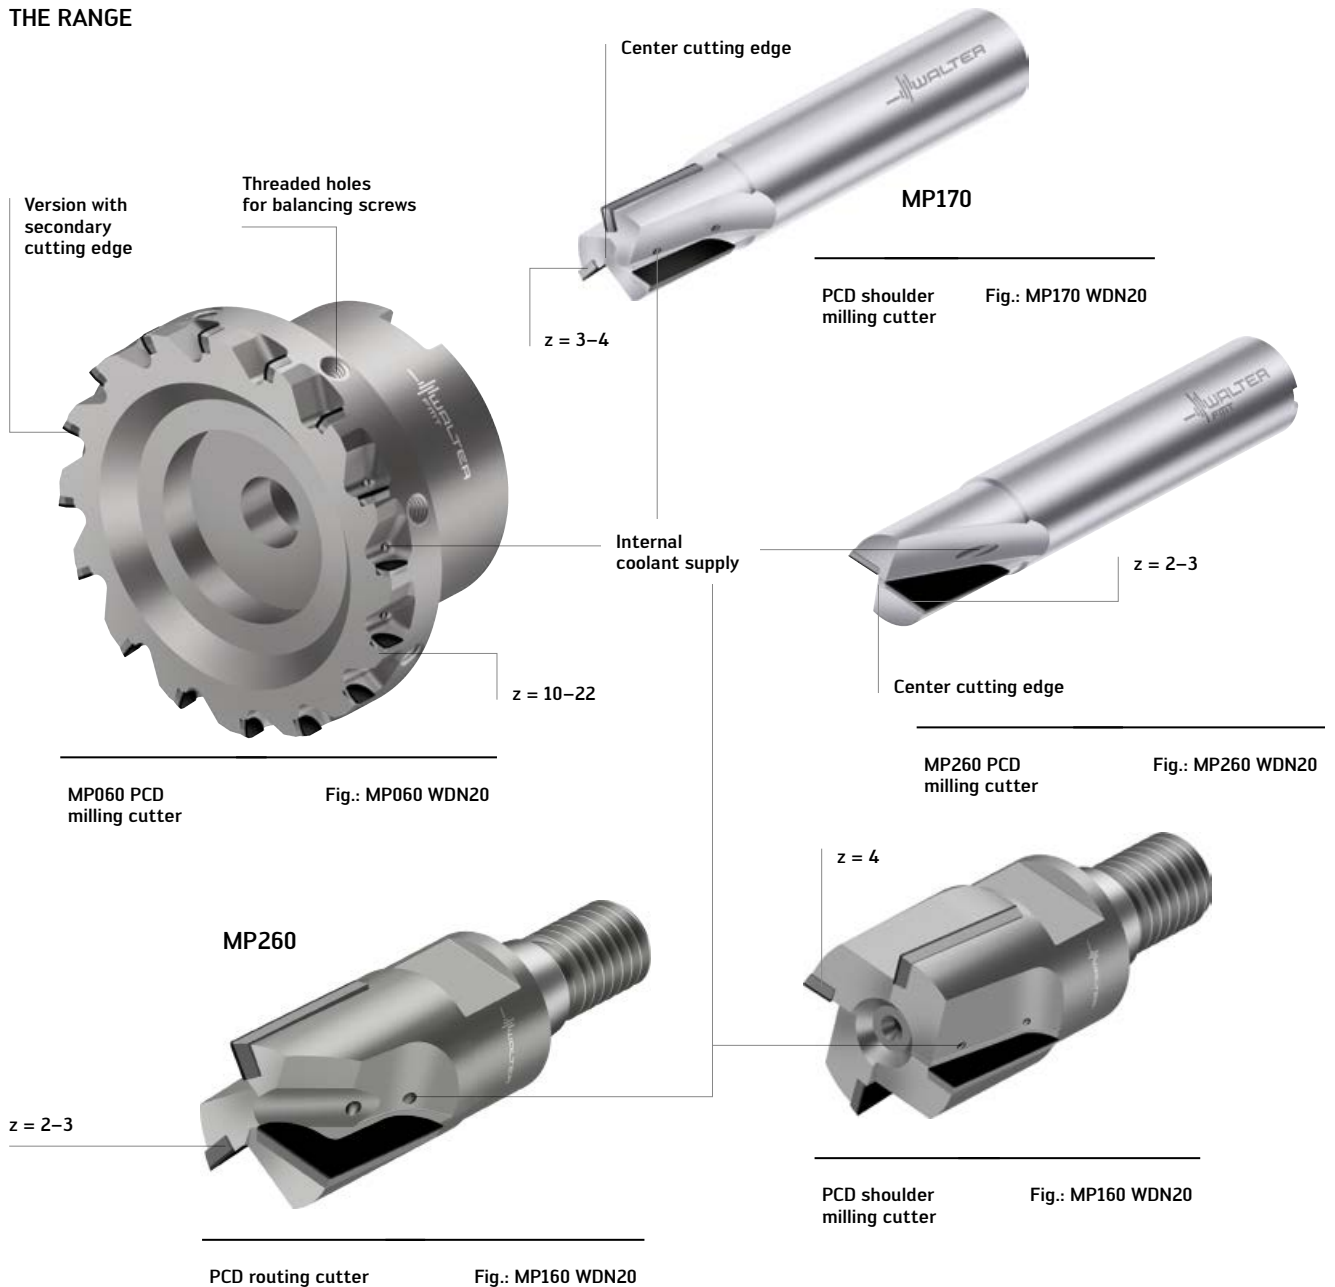

POTENTIAL BENEFITS

- Cost-effective, precise machining
- Reduced cutting forces and minimal vibration tendency due to optimised geometries
- Low cutting tool material costs due to tool life being 20 to 200 times longer
- Possibility of reconditioning and/or reconfiguration

Advanced specialists for aluminium.

EXPANSION OF THE RANGE

NEW ADDITION TO THE PRODUCT RANGE

MC166 Advance

- z2 and z3 – without corner radius

MC267 Advance

- z3 without corner radius (DIN 6527 L)

MC467 Advance

- Radius copy milling cutter
- z2

THE TOOL

MC166 Advance


- Dia. 12–20 mm/z3
- Increased core stability
- WJ30UU grade (uncoated)

MC267 Advance

- MC267 Advance: z2 and z3, dia. 1–20 mm with and without neck; with and without radius; coated and uncoated; centre cut
- Universal high-performance milling cutter and universal milling cutter for ISO N machining

MC467 Advance

- Radius copy milling cutter
- z = 2
- DIN 6527 L

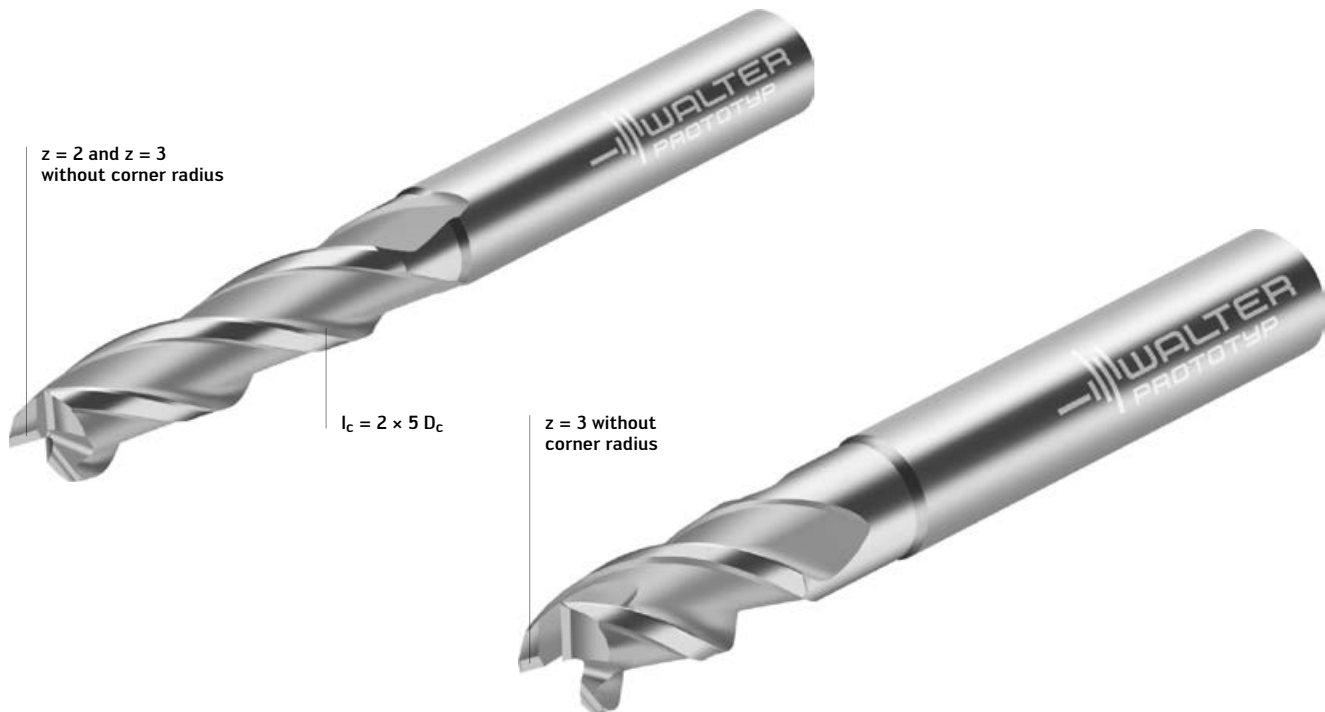

Solid carbide milling cutter

Fig.: MC166 Advance WJ30UU
Fig.: MC267 Advance WJ30UU

THE GRADE

- WJ30UU (uncoated)

THE APPLICATION

MC166 Advance


- Developed for finishing or dynamic roughing of deep pockets and cavities
- Specially designed for dynamic milling (low a_e , high a_p , large L_c)

MC267 Advance

- Can be used universally for roughing, semi-finishing and finishing
- Finish machining of tight radii in the aerospace industry
- Specialist for finishing high walls

MC467 Advance

- Machining of 3D contours

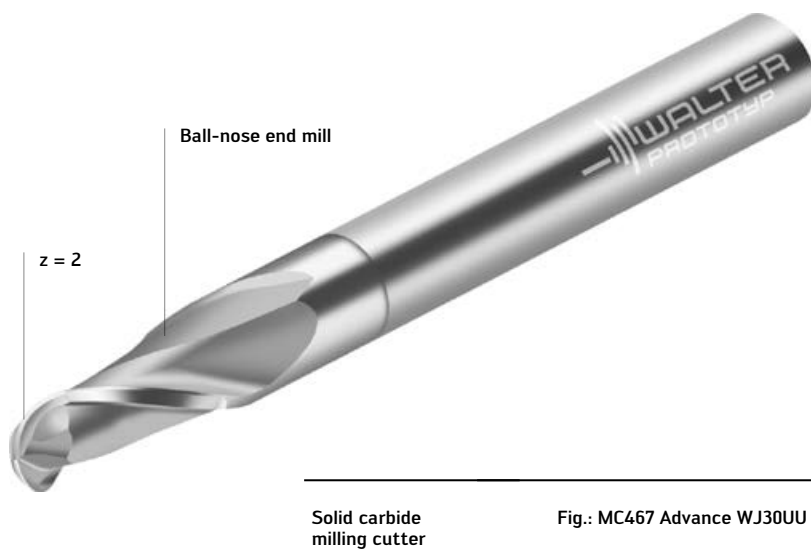

POTENTIAL BENEFITS

MC166 Advance

- Consistent process reliability thanks to increased core stability

MC267 Advance

- Considerable process reliability and can be used universally in all sectors of industry
- Differential pitch for optimum operational smoothness and huge increase in tool life

MC467 Advance

- Universal applicability for machining of 3D contours
- High level of process reliability in unmanned machining

Top marks for precision in ISO S and M.

NEW

THE GRADE


- PVD-coated Tiger-tec® Gold milling grades WSM36G
- AlTiN coating with excellent layer bonding
- Gold-colored ZrN top layer
- Layer thickness optimised for best coverage of sharp cutting edges
- Smooth layer with perfect balance between toughness and wear resistance

THE APPLICATION

- Precise copying and finishing of freeform surfaces and deep cavities
- Grade for machining of, for example, structural components made from titanium alloys
- Further fields of application: Nickel-based alloys and stainless steel
- Can be used in the Xtra-tec® XT M5460 copy finishing cutters
- Areas of use: Aerospace, energy industry, mould and die making, general mechanical engineering

APPLICATION EXAMPLE


Structural component

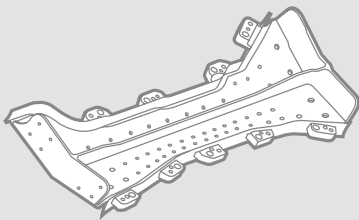

Material: Ti6Al4V
Strength: 34 HRC
Tool: M5460-016-A16-02-08
Indexable insert: P3204-D16 WSM36G

Cutting data	Existing	Walter WSM36G
v_c (m/min)	105	105
f (mm)	0.15	0.15
v_f (mm/min)	1323	1323
a_p (mm)	0.5	0.5
a_e (mm)	0.63	0.63
Cooling	Emulsion – internal	

Comparison: Tool life

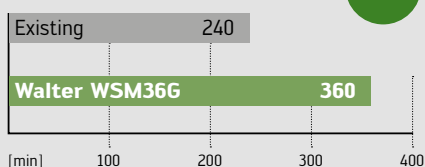

Xtra-tec® XT M5460 –
with ScrewFit, cylindrical-modular
interface or cylindrical shank

Cutting diameter (D_c):
8–32 mm, 3/8"–1.0"



P3204 exchangeable
insert with fully
ground circumference

Tiger-tec®Gold

New Tiger-tec® Gold grade
WSM36G in copying and finishing

Fig.: M5460-020-T18-02-10
P3204-D20 WSM36G

POTENTIAL BENEFITS

- Maximum process reliability due to strong cutting edges
- Best surface quality due to smooth coatings with optimum chip removal
- Maximum cost-efficiency due to high cutting speed
- Best wear detection due to ZrN top layer

Shiny surfaces – gold finish.


NEW

THE GRADE

- PVD-coated Tiger-tec® Gold milling grades WPM15G
- AlTiN coating with the best layer bonding
- Gold-colored ZrN top layer
- Layer thickness optimised for best coverage of sharp cutting edges
- Smooth layer with perfect balance between toughness and wear resistance

THE APPLICATION

- For finish-milling
- Available for all finishing inserts for Xtra-tec® XT, Walter BLAXX and M4000
- Steels, stainless steels and cast iron
- Areas of use: General mechanical engineering, mold and die making, aerospace, energy and automotive industries

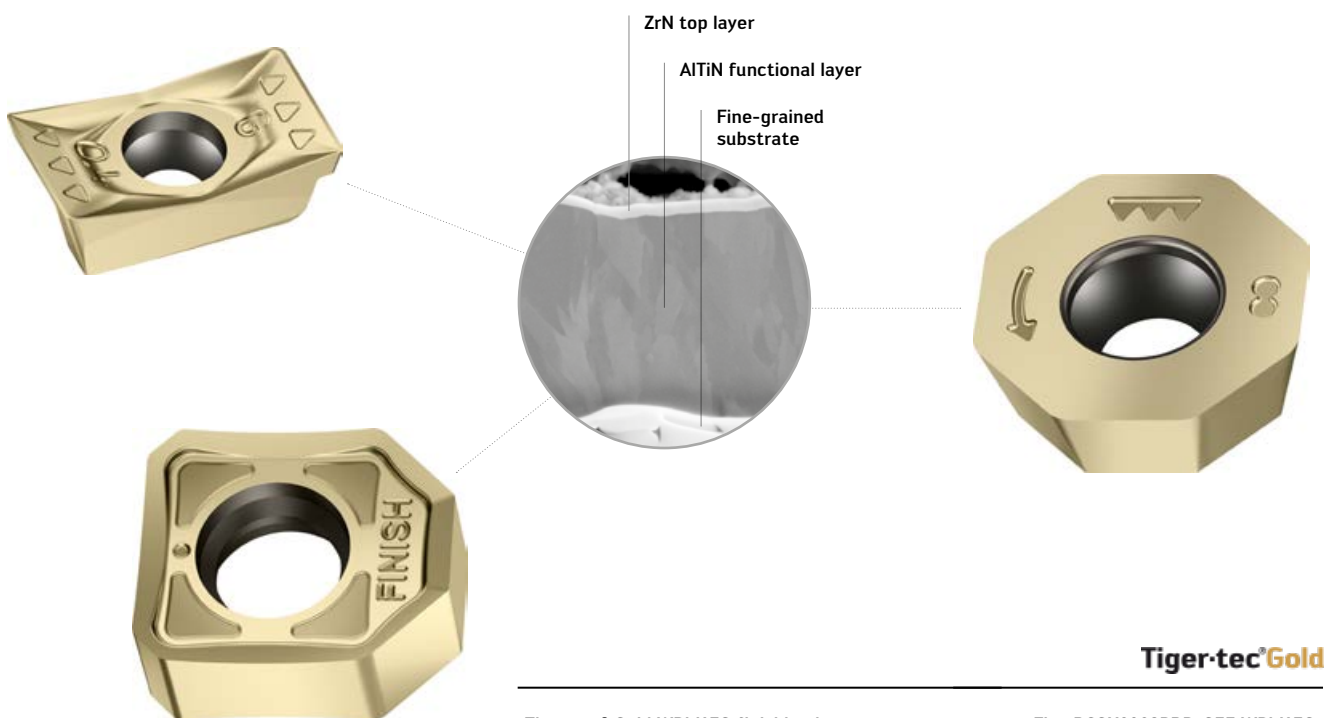

Tiger-tec® Gold WPM15G finishing inserts

Tiger-tec®Gold

Fig.: BCGX0903PDR-G55 WPM15G
Fig.: ODHX0605ZZN-A88 WPM15G
Fig.: XNGX0904ANN-F67 WPM15G

POTENTIAL BENEFITS

- Good wear detection due to ZrN top layer
- Maximum surface quality on the component
- Universal application in many different materials

Insider with exceptional flexibility and versatility.


NEW

THE TOOL

- Circular milling tools to create various different recesses in holes
- Weldon and cylindrical shanks made from steel and solid carbide
- Diameter range: 6.7–39.7 mm
- Exchangeable heads with z3 and z6
- Four different exchangeable head versions: MG510, MG515, MG520 and MG545

THE APPLICATION

- Internal machining of holes: Slot milling, circlip grooves, chamfer milling
- Areas of use: General mechanical engineering and the automotive industry
- Primary application: Steel, stainless steel, cast iron and hardened steel
- Secondary application: Non-ferrous materials and materials with difficult cutting properties

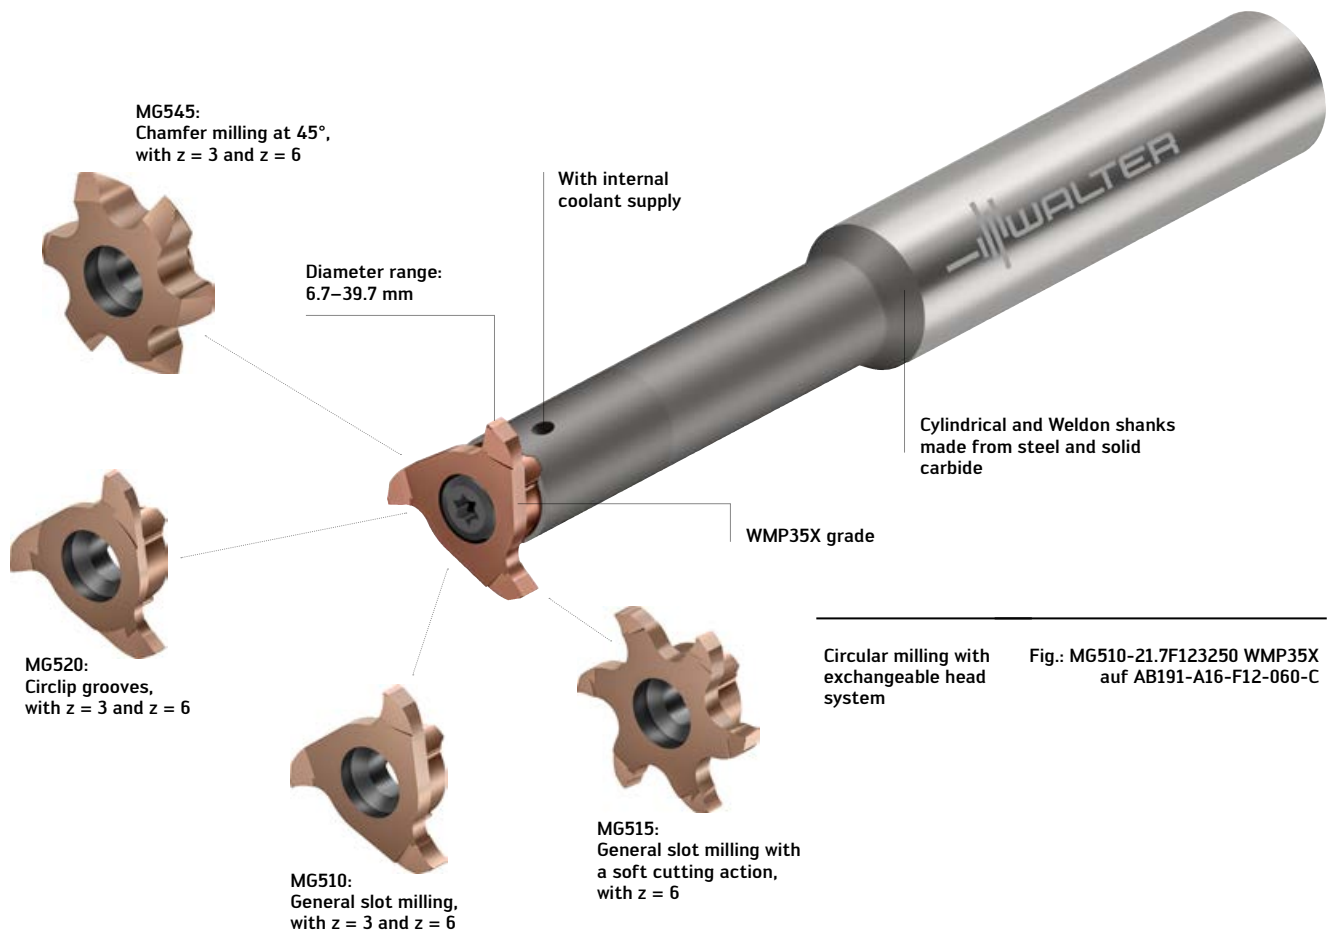

POTENTIAL BENEFITS

- Lower tool costs and less effort thanks to exchangeable head system for universal application
- High level of process reliability due to stable solid carbide shanks
- High productivity due to high-quality coating and up to six teeth
- Universal application in all materials
- High level of flexibility due to the variety of different versions in the modular tooling system



C8 interface – for a wider Walter Capto™ range.

NEW

THE TOOL

- In accordance with ISO 26623

AB001-C

- For shell end milling cutters with tenon in accordance with DIN 1880
- Bore adaption sizes: 16–60 mm

AB044-C

- For tools with a parallel shank and lateral clamping flat according to DIN 1835-B and DIN 6535-HB
- Diameter range: 6–40 mm

THE INTERFACE

- Walter Capto™ C3–C8

THE APPLICATION

- Can be used on all common machining centres with spindles in accordance with ISO 26623
- Areas of application:
General mechanical engineering, automotive, aeronautical industry, food and medical industries

AB001-C

- Milling
- Tools with indexable inserts

AB044-C

- Milling and drilling
- Solid carbide tools

Walter Capto™ shell mill cutter adaptor



Shell mill arbor adaptors Fig.: AK155.8.C8.030.22

Walter Capto™ Weldon adaptor



Weldon adaptors

Fig.: C8-391.20-16 070

POTENTIAL BENEFITS

- Maximum process reliability due to stable design
- High repeat accuracy
- Flexibility due to modular components such as adapters and extensions
- Excellent torque transmission due to positive engagement

HSK Program – more variety, more possibilities.

NEW

THE TOOL

- In accordance with ISO 12164/DIN 69893-1 A
- Internal coolant supply
- Balanced G2.5 at 25,000 rpm

AB001-H

- For shell end milling cutters with tenon in accordance with DIN 1880
- Bore adaption sizes: 16–60 mm
- Three lengths: 50, 100 and 160 mm
- Concentricity $\leq 6 \mu\text{m}$

AB009-H

- For collets in accordance with DIN 6499
- Five lengths: 75, 100, 130, 160 and 200 mm

AB044-H

- For tools with a parallel shank and lateral clamping flat according to DIN 1835-B and DIN 6535-HB
- Diameter range: 6–40 mm
- Three lengths: 65, 120 and 160 mm

AB009-H / AB044-H

- Concentricity (L1) up to 160 mm $\leq 3 \mu\text{m}$
- Concentricity (L1) over 160 mm $\leq 4 \mu\text{m}$

THE INTERFACE

- HSK-A 63
- HSK-A 100

THE APPLICATION

- Can be used on all common machining centers with spindles in accordance with ISO 12164/DIN 69893
- Areas of application:
General mechanical engineering, automotive, aeronautical industry, food and medical industries

AB001-H

- Milling
- Tools with indexable inserts

AB009-H

- Drilling and threading

AB044-H

- Milling and drilling

AB009-H / AB044-H

- Solid carbide tools



POTENTIAL BENEFITS

- Universal application
- High precision concentricity for improved tool life and better surfaces
- All adaptors with internal coolant supply
- Varied range of products allows for versatility

Large variety for most applications.

NEW

THE TOOL

- In accordance with ISO 7388-1/DIN 69871 AD/B
- Version AD/B
- Balanced G6.3 at 15,000 rpm
- Concentricity $\leq 3 \mu\text{m}$

AB001-S

- For shell end milling cutters with tenon in accordance with DIN 1880
- Bore adaption sizes: 16–60 mm
- Three lengths: 50, 100 and 160 mm

AB009-S

- For all common ER collet sizes: ER16–ER40
- For collets in accordance with DIN 6499
- Three lengths: 70, 100 and 130 mm

AB044-S

- For tools with a parallel shank and lateral clamping flat according to DIN 1835-B and DIN 6535-HB
- Diameter range: 6–40 mm
- Three lengths: 65, 120 and 160 mm

THE INTERFACE

- SK40
- SK50

THE APPLICATION

- Can be used on all common machining centers with spindles in accordance with ISO 7388-1/DIN 69871
- Areas of application: General mechanical engineering, automotive, aeronautical industry, food and medical industries

AB001-S

- Milling
- Tools with indexable inserts

AB009-S


- Can be used for milling, drilling and threading

AB044-S

- Can be used for milling and drilling

AB009-S / AB044-S

- Can be used for solid carbide tools

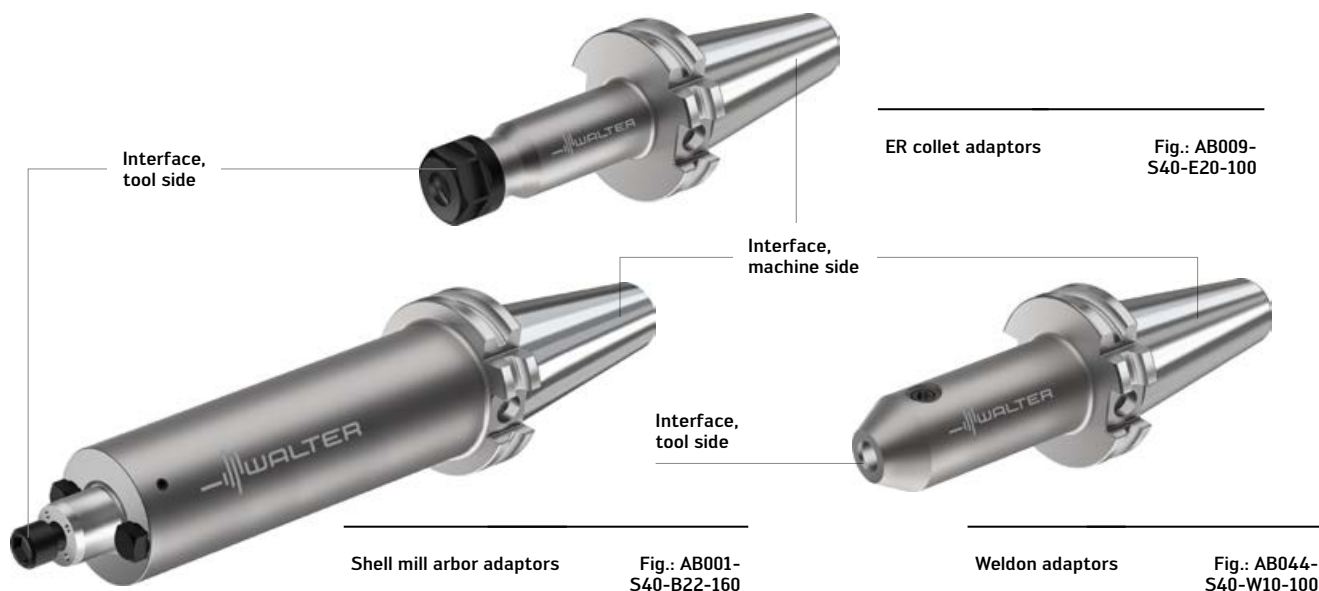

POTENTIAL BENEFITS

- Universal application
- High precision concentricity for improved tool life and better surfaces
- All adaptors with internal coolant supply
- Varied range of products allows for versatility

Wide range, versatile.

NEW

THE TOOL

- In accordance with ISO 7388-2/JIS B 6339
- Version AD/B
- Balanced G6.3 at 15,000 rpm
- Concentricity $\leq 3 \mu\text{m}$

AB001-J

- For shell end milling cutters with tenon in accordance with DIN 1880
- Bore adaption sizes: 16–60 mm
- Three lengths: 50, 100 and 160 mm

AB009-J

- For all common ER collet sizes: ER16–ER40
- For collets in accordance with DIN 6499
- Three lengths: 70, 100 and 160 mm

AB044-J

- For tools with a parallel shank and lateral clamping flat according to DIN 1835-B and DIN 6535-HB
- Diameter range: 6–40 mm
- Three lengths: 65, 120 and 160 mm

THE INTERFACE

- MAS-BT40
- MAS-BT50

THE APPLICATION

- Can be used on all common machining centers with spindles in accordance with ISO 7388-2/JIS B 6339
- Areas of application:
General mechanical engineering, automotive, aeronautical industry, food and medical industries

AB001-J

- Milling
- Tools with indexable inserts

AB009-J


- Can be used for milling, drilling and threading

AB044-J

- Can be used for milling and drilling

AB009-J / AB044-J

- Can be used for solid carbide tools

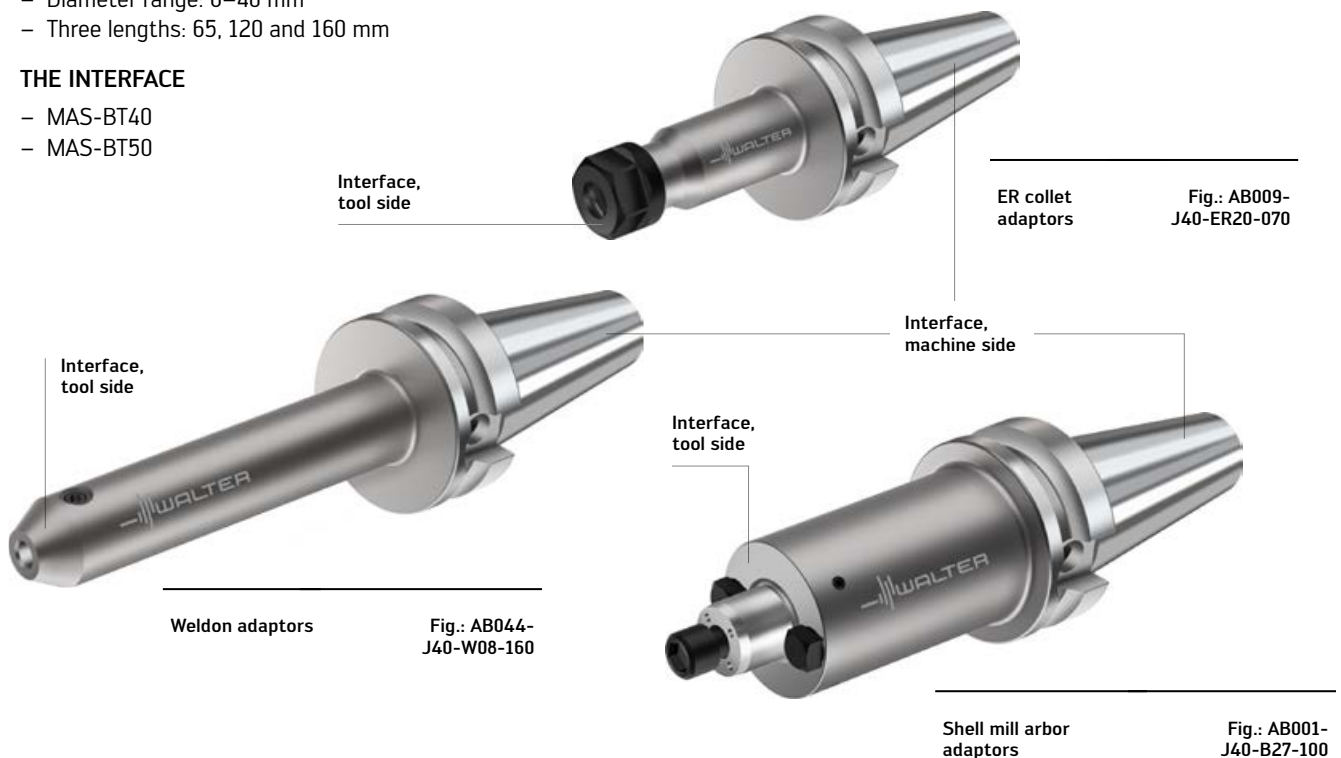

POTENTIAL BENEFITS

- Universal application
- High precision concentricity for improved tool life and better surfaces
- All adaptors with internal coolant supply
- Varied range of products allows for versatility

Enables new projects and machine equipment.

NEW

THE TOOL

- Balanced G2.5 at 25,000 rpm

AB017

- For tools with commercially available shank types: Cylindrical
- For Form A: With smooth shank in accordance with DIN 1835 and DIN 6535 HA
- For Form AB: With flat face and cylindrical shank as well as driving planes in accordance with DIN 1835 and DIN 6535 HB
- For Form B: With lateral driving planes in accordance with DIN 1835
- For Form E: With inclined clamping surface in accordance with DIN 1835 and DIN 6535 HE
- Concentricity and repeat accuracy during indexing:
 $\leq 3 \mu\text{m}$ at $2.5 \times D$

Ø - ranges

- HSK-A63, HSK-A100; SK40; MAS-BT40: 6–32 mm
- SK50; MAS-BT50: 12–32 mm
- CAT-V40: 6–20 mm, 1/4–3/4"
- CAT-V50: 12–32 mm, 1/2" to 1-1/4"

AB025

- Version: 4.5°
- Concentricity (L1) up to 160 mm $\leq 3 \mu\text{m}$
- Concentricity (L1) over 160 mm $\leq 4 \mu\text{m}$
- Diameter range: 3–32 mm
- Available in four lengths: 80, 120, 160 and 200 mm

THE INTERFACE

AB017 + AB025

- HSK-A63, HSK-A100
- SK40, SK50
- MAS-BT40, MAS-BT50

AB017

- MAS-BT30
- CAT-V40, CAT-V50

THE APPLICATION

- Can be used on all conventional machining centres
- Can be used for milling and drilling
- Can be used for solid carbide tools
- Areas of application:
General mechanical engineering, automotive, aeronautical industry, food and medical industries



POTENTIAL BENEFITS

- Increased spindle service life due to high taper quality
- Maximum productivity and cost-efficiency
- Varied range of products allows for versatility
- Precise adjustment of tool lengths and clamping against an adjustable stop

AB017

- High level of concentricity and vibration-damping effect especially when milling

Xill-tec®

Universal eXcellence
in milling.

Xill-tec®



With Xill-tec®, the solid carbide milling cutters from the MC230 Advance range, Walter offers you unprecedented universality and excellence in milling: Universal, due to versatility for virtually any application and any material. Excellent, due to the unique combination of a new high-performance geometry with Walter's own wear-resistant WK40TF high-performance grade. This makes Xill-tec® a byword for the greatest operational smoothness, tool life increases and process reliability. And all with outstanding cost-effectiveness.

www.solid-carbide-milling.walter




walter-tools.com

 **WALTER**
Engineering Kompetenz

Walter AG

Derendinger Straße 53, 72072 Tübingen
Postfach 2049, 72010 Tübingen
Germany

walter-tools.com

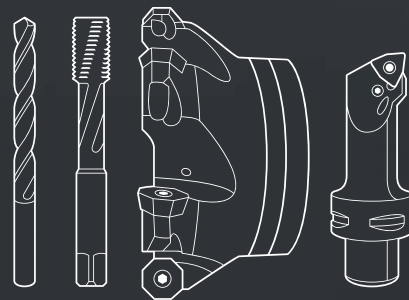

Europe

Walter Austria GmbH

Wien, Österreich
+43 1 5127300-0, service.at@walter-tools.com

Walter Benelux N.V./S.A.

Zaventem, Belgique
(B) +32 (02) 7258500
(NL) +31 (0) 900 26585-22
service.benelux@walter-tools.com

Walter (Schweiz) AG

Solothurn, Schweiz
+41 (0) 32 617 40 72, service.ch@walter-tools.com

Walter CZ s.r.o.

Kurim, Czech Republic
+420 (0) 541 423352, service.cz@walter-tools.com

Walter Deutschland GmbH

Tübingen, Deutschland
+49 (0) 7071 701-400, service.de@walter-tools.com

Walter France

Soultz-sous-Forêts, France
+33 (0) 3 88 80 20 00, service.fr@walter-tools.com

Walter Hungária Kft.

Budapest, Magyarország
+36 1 464 7160, service.hu@walter-tools.com

Walter Tools Ibérica S.A.U.

El Prat de Llobregat, España
+34 934 796760, service.iberica@walter-tools.com

Walter Italia s.r.l.

Via Volta, s.n.c., 22071 Cadorago - CO, Italia
+39 031 926-111, service.it@walter-tools.com

Walter Norden AB

Halmstad, Sweden
+46 (0) 35 16 53 00, service.norden@walter-tools.com

Walter Polska Sp. z o.o.

Warszawa, Polska
+48 (0) 22 8520495, service.pl@walter-tools.com

Walter Tools SRL

Timisoara, România
+40 (0) 256 406218, service.ro@walter-tools.com

Walter Tools d.o.o.

Maribor, Slovenija
+386 (2) 629 01 30, service.si@walter-tools.com

Walter Slovakia, s.r.o.

Nitra, Slovakia
+421 (0) 37 3260 910, service.sk@walter-tools.com

Walter Kesici Takımlar Sanayi ve Ticaret Ltd. Şti.

Bursa, Türkiye
+90 (0) 224 909 5000 Pbx, service.tr@walter-tools.com

Walter GB Ltd.

Bromsgrove, England
+44 (1527) 839 450, service.uk@walter-tools.com

Asia

Walter Wuxi Co. Ltd.

Wuxi, Jiangsu, P.R. China
+86 (510) 853 72199, service.cn@walter-tools.com

Walter Wuxi Co. Ltd.

中国江苏省无锡市新区新畅南路 3 号
电话 : +86-510-8537 2199 邮编 : 214028
客服热线 : 400 1510 510
邮箱 : service.cn@walter-tools.com

Walter Tools India Pvt. Ltd.

Pune, India
+91 (20) 6773 7300, service.in@walter-tools.com

Walter Japan K.K.

Nagoya, Japan
+81 (52) 533 6135, service.jp@walter-tools.com

ワルタージャパン株式会社

名古屋市中村区名駅二丁目 45 番 7 号
+81 (0) 52 533 6135, service.jp@walter-tools.com

Walter Korea Ltd.

Anyang-si Gyeonggi-do, Korea
+82 (31) 337 6100, service.wkr@walter-tools.com

한국발터(주)

경기도 안양시 동안구 학의로 282
금강펜테리움 106호 14056
+82 (0) 31 337 6100, service.wkr@walter-tools.com

Walter Malaysia Sdn. Bhd.

Selangor D.E., Malaysia
+60(3)-5624 4265, service.my@walter-tools.com

Walter AG Singapore Pte. Ltd.

+65 6773 6180, service.sg@walter-tools.com

Walter (Thailand) Co., Ltd.

Bangkok, 10120, Thailand
+66 2 687 0388, service.th@walter-tools.com

America

Walter do Brasil Ltda.

Sorocaba – SP, Brasil
+55 15 32245700, service.br@walter-tools.com

Walter Canada

Mississauga, Canada
service.ca@walter-tools.com

Walter Tools S.A. de C.V.

El Marqués, Querétaro, México
+52 (442) 478-3500, service.mx@walter-tools.com

Walter USA, LLC

Greer, SC, USA
+1 800-945-5554, service.us@walter-tools.com